

Coaxial Fixed Attenuator

2.4mm Female/DC-50GHz

Model: TAXXA2-2.4-50-F

TAXXA2-2.4-50-F is a 1~3/4~8/9~25/26~40 dB coaxial attenuator that is used in millimeterwave systems and operates from DC to 50 GHz.

Features:

- Operating Frequency DC to 50GHz
- Broadband Coverage
- Lost Cost

Applications:

- Test Lab
- Instrumentations
- System Integration


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	DC		50	GHz
衰减范围 Attenuation Range		1~3(-0.6/+0.9)		dB
		4~8(-0.7/+1.0)		dB
		9~25(-0.8/+0.8)		dB
		26~40(-0.9/+1.0)		dB
驻波 VSWR			1.3	:1
阻抗 Impedance		50		Ohms
射频功率值 RF Power Rating	2 Watts Average at 25°C PEAK: 100 Watts(5 μs pulse width, 1% duty cycle)			

环境和机械特性 Envrionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-55 To +125	°C
壳体材质 Body Material	Passivated stainless stee	
连接器材质 Connector Material	Passivated stainless steel /brass, ternary alloy plated	
内导体 Inner Conductor	Gold plated beryllium copper	
绝缘体 Insulators	PEI	
接口 Connectors	2.4mm Female	
长度 Length	16.4	mm

外形图 Outline Drawing: Unit:mm

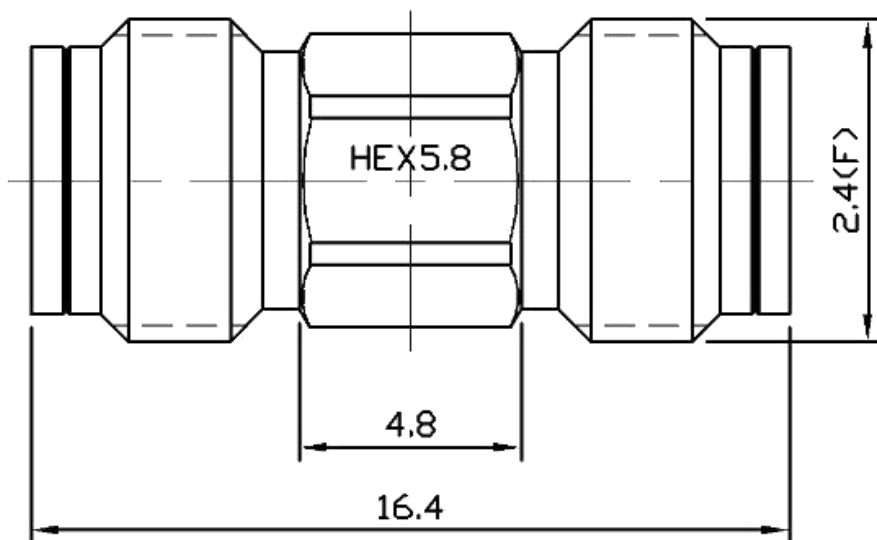

ESD Protection: Strictly
adhere to ESD precautions
to prevent electrostatic
damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description
TA01A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,1(-0.6/+0.9)dB Attenuation
TA02A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,2(-0.6/+0.9)dB Attenuation
TA03A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,3(-0.6/+0.9)dB Attenuation
TA04A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,4(-0.7/+1.0)dB Attenuation
TA05A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,5(-0.7/+1.0)dB Attenuation

订货信息 Ordering Information:

标准型号 Base Number	描述 Description
TA06A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,6(-0.7/+1.0)dB Attenuation
TA07A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,7(-0.7/+1.0)dB Attenuation
TA08A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,8(-0.7/+1.0)dB Attenuation
TA09A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,9(-0.8/+0.8)dB Attenuation
TA10A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,10(-0.8/+0.8)dB Attenuation
TA11A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,11(-0.8/+0.8)dB Attenuation
TA12A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,12(-0.8/+0.8)dB Attenuation
TA13A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,13(-0.8/+0.8)dB Attenuation
TA14A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,14(-0.8/+0.8)dB Attenuation
TA15A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,15(-0.8/+0.8)dB Attenuation
TA16A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,16(-0.8/+0.8)dB Attenuation
TA17A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,17(-0.8/+0.8)dB Attenuation
TA18A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,18(-0.8/+0.8)dB Attenuation
TA19A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,19(-0.8/+0.8)dB Attenuation
TA20A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,20(-0.8/+0.8)dB Attenuation
TA21A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,21(-0.8/+0.8)dB Attenuation
TA22A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,22(-0.8/+0.8)dB Attenuation
TA23A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,23(-0.8/+0.8)dB Attenuation

订货信息 Ordering Information:

标准型号 Base Number	描述 Description
TA24A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,24(-0.8/+0.8)dB Attenuation
TA25A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,25(-0.8/+0.8)dB Attenuation
TA26A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,26(-0.9/+1.0)dB Attenuation
TA27A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,27(-0.9/+1.0)dB Attenuation
TA28A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,28(-0.9/+1.0)dB Attenuation
TA29A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,29(-0.9/+1.0)dB Attenuation
TA30A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,30(-0.9/+1.0)dB Attenuation
TA31A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,31(-0.9/+1.0)dB Attenuation
TA32A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,32(-0.9/+1.0)dB Attenuation
TA33A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,33(-0.9/+1.0)dB Attenuation
TA34A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,34(-0.9/+1.0)dB Attenuation
TA35A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,35(-0.9/+1.0)dB Attenuation
TA36A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,36(-0.9/+1.0)dB Attenuation
TA37A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,37(-0.9/+1.0)dB Attenuation
TA38A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,38(-0.9/+1.0)dB Attenuation
TA39A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,39(-0.9/+1.0)dB Attenuation
TA40A2-2.4-50-F	Coaxial Fixed Attenuator, DC-50GHz,40(-0.9/+1.0)dB Attenuation